

Harlequin RockSure™






Harlequin RockSure is a polymer composite; it is a tough, easily managed stage surface designed for use in live performance spaces. This stage floor product is strong enough to support heavy loads, making it an ideal solution for all types of theatrical productions. The floor provides a matte black surface which does not require painting.

Harlequin RockSure can be used for both new stages builds and stage refurbishment. It provides an attractive matte black alternative to more traditional stage surfaces such as wood, a painted "sacrificial" layer of hardboard, or Harlequin heavy-duty vinyl.

Harlequin RockSure can be installed by our highly-skilled technical team or is available for purchase as a stand-alone material. It is manufactured to be squared, pre-drilled, and counter-sunk, and can be worked with standard woodworking tools.

**Harlequin RockSure™ available by special order only.*

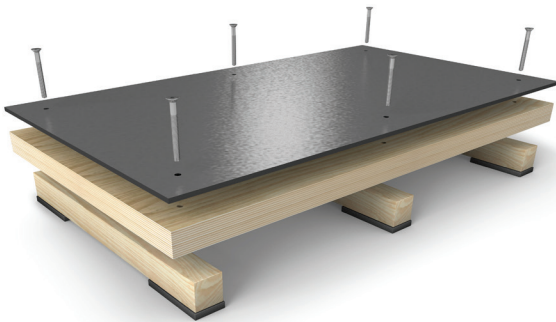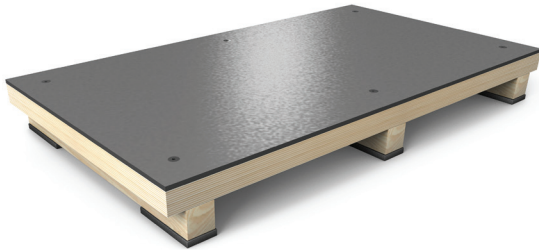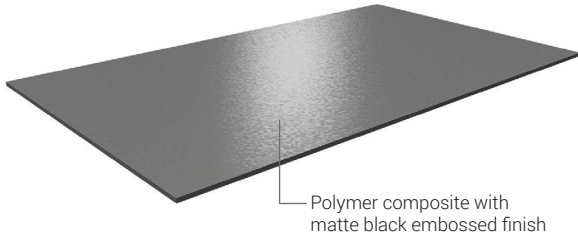

High Impact Resistance	Withstands shock and damage from falling objects e.g. shackles, clamps, tools, etc.
Abrasion Resistant	Suitable for lifts, castors, and movement of props — load-ins and load-outs. Extremely hard wearing.
Flame Retardant	Safe in fire risk areas, e.g. pyrotechnics.
Dielectric Material	Extreme electrical resistance and insulation.
Uniform Body Color	No painting required. Scratches are imperceptible.
Compression Strength Exceeds 24,000 psi	Extremely difficult to damage. Will not warp.
High Chemical Resistance	Shrugs off water and common stage chemical spills.
Low Coefficient of Thermal Expansion	Expansion joints not required.
Machineable	Can be drilled and screwed as conventional hardwood with carpenter's tools.
High Fusion Temperature	Withstands heat exceeding 390°F.

Specification Guide

Installation	Permanent
Floor Panel Size	48" x 96" (4' x 8')
Color	Matte black with a frost emboss
Weight	1.7 lbs/ft ²
Thickness (nominal)	6mm
Fire rating	Bfl-s1 (EN 13501-1)
Flammability	UL 94 HB

American Harlequin Corporation
1531 Glen Avenue
Moorestown, NJ 08057

(800) 642 6440
contact@harlequinfloors.com
harlequinfloors.com

The Company reserves the right to make any variation in design or construction of the material described.
© Harlequin Floors 01/2022.

PHILADELPHIA
LOS ANGELES
LAS VEGAS
LONDON
PARIS
BERLIN
LUXEMBOURG
MADRID
SYDNEY
HONG KONG
TOKYO

CALL 800-642-6440 or VISIT www.harlequinfloors.com
For samples or information on Harlequin Floors complete range of vinyl and sprung floors.